



Stainless steel sliders provide enlarged contact area with the plate, thus improving overall rigidity. Flat alignment with the plate allows for maximum adjustment range.



WARNING! Tighten the bolts to torque specification given on the plate.

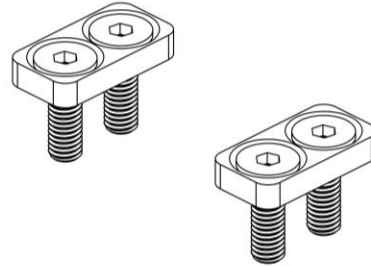


High strength anodized aluminium plate with additional caster correction bolt pattern. Proper marking ensures easy installation. Please turn the page for setup clarification.

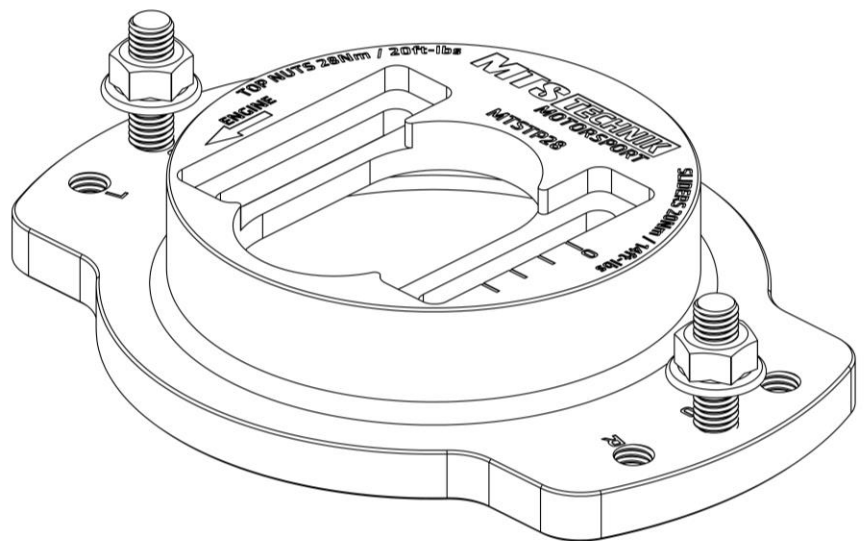


WARNING! Tighten the top nuts to torque specification given on the plate. While tightening the nuts hold the bolts still from the bottom.




Brand new, preloaded, spherical bearing - developed and tested in extreme conditions by MTS Technik. Optimal bearing material selection for best corrosion resistance. Proven to withstand thousands of kilometres without any damage.

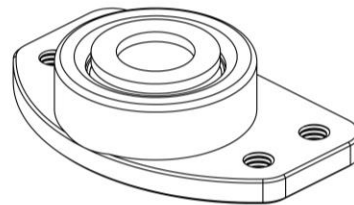


Top spring cap with integrated sealed bearing offers smooth and quiet operation with great reliability. Precise steering without knocks and creaks.

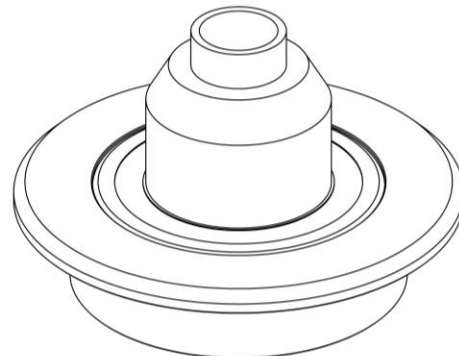

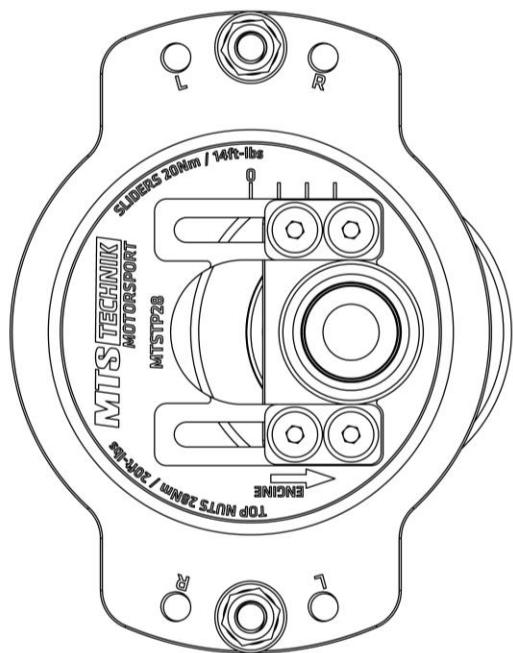

**FULL CAMBER
OEM CASTER**

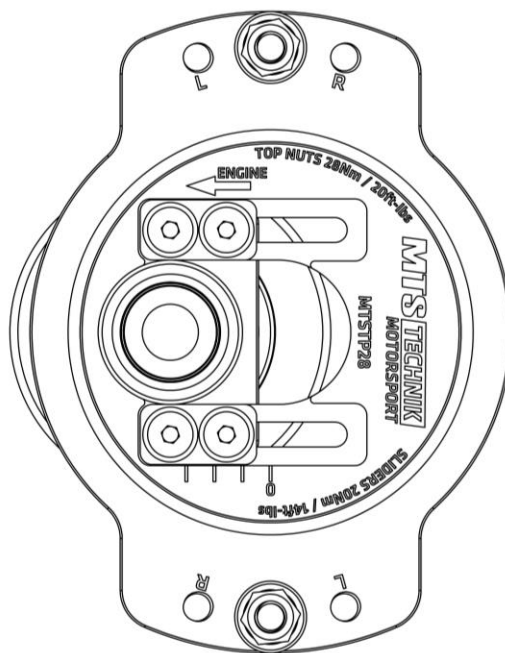

**FULL CAMBER
+30' CASTER**

